


**Serie | 4, induction hob, 60 cm, Black
PUE611BB1E**

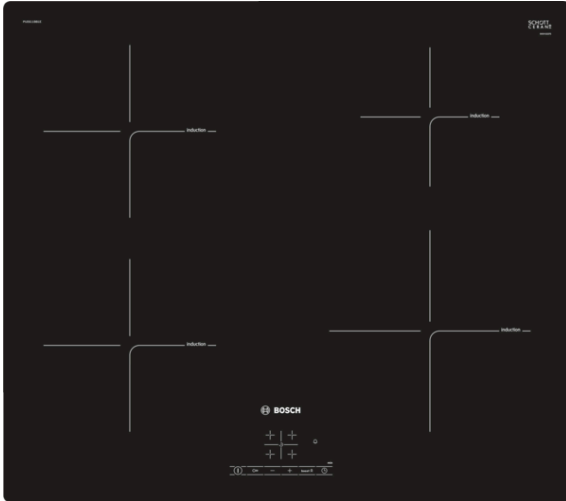

Optional accessories

HEZ9SE030 : Set of 2 pots and 1 pan

The Induction hob: Faster than gas and ceramic hobs, induction is easier to clean and more energy efficient.

- **TouchSelect:** Selection of the desired cooking zone and easy setting of the desired power level.
- **PowerBoost:** Up to 50% more power for faster heating.
- The handy ChildLock locks the control panel to prevent accidental changes in settings.
- **Induction:** Fast, precise cooking, easy cleaning and low energy consumption.

Technical Data

Product name/family :	Cooking zone ceramic
Construction type :	Built-in
Energy input :	Electric
Total number of positions that can be used at the same time :	4
Required niche size for installation (HxWxD) :	51 x 560-560 x 490-500
Width of the appliance :	592
Dimensions :	51 x 592 x 522
Dimensions of the packed product (HxWxD) (mm) :	126 x 753 x 603
Net weight (kg) :	11.371
Gross weight (kg) :	12.6
Residual heat indicator :	Separate
Location of control panel :	Hob front
Basic surface material :	Ceramic
Color of surface :	Black
Approval certificates :	AENOR, CE
Length electrical supply cord (cm) :	110
EAN code :	4242002870502
Electrical connection rating (W) :	4600
Voltage (V) :	220-240
Frequency (Hz) :	50; 60



4 242002 870502

Serie | 4, induction hob, 60 cm, Black PUE611BB1E

The Induction hob: Faster than gas and ceramic hobs, induction is easier to clean and more energy efficient.

Design

- 592 mm
- Frameless design

Special features

- Electronic control
- TouchControl
- 4 induction cooking zones
- Digital display, red
- Variable 17-stage power settings for each zone
- QuickStart function
- ReStart function
- Timer for all zones Timer - shows how long the cooktop is in use

Safety Features

- Main on/off switch
- Automatic pan recognition sensor Safety cut-out switch-off
Control panel lock
- 2 stage residual heat indicator for each zone

Power and size

- Connected load: 4.6 KW
- Cooking zones: 1 x Ø 180 mm, 1.8 KW (max. Power levels 3.1 KW) Induction; 1 x Ø 180 mm, 1.8 KW (max. Power levels 3.1 KW) Induction; 1 x Ø 145 mm, 1.4 KW (max. Power levels 2.2 KW) Induction; 1 x Ø 210 mm, 2.2 KW (max. Power levels 3.7 KW) Induction

Performance/technical information

- Cable included
- Connection cable 110 cm
- Measurement: (H/W/D) 51 x 592 x 522 mm
- Installation dimensions: (ID/W/D) 51 mm x 560 mm x 490 mm
- Min. worktop thickness: 16 mm

Quickness

- PowerBoost function for all zones

